
KITO 20



The **KITO 20** model is distinguished by a different base plate in which a flat LED light plate is incorporated. So that the light plate does not jut out when cross tables are being used, the LED light plate is inlaid in the cut-out. The light plate cable is screwed on to the underside with cable clips and is run on the left next to the height adjuster upwards.

The illuminated area has a diameter of 70 mm. The cut-out is longer in the direction of the rack system, as a parallel bottom light can be used in these base plates as an alternative to the diffuse bottom light (see page 11). Because of the cut-out, only five different prepunched holes for cross tables are available on this light plate (see page 13). Weight: 10 kg Dimensions: 400 x 250 x 550 – 670 mm.

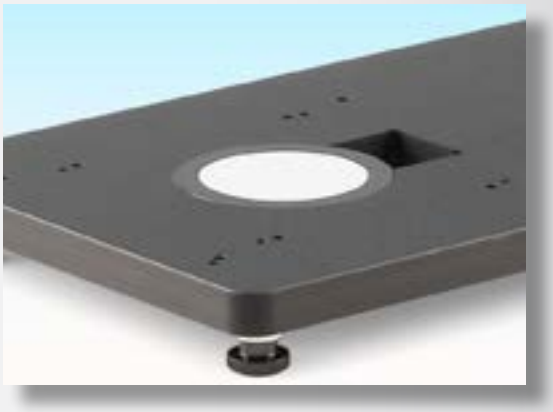

Scope of delivery and price for the **KITO 20** below:

KITOZOOM video microscope series
- **Order no. KITO 20 - ECO**
- **KITOZOOM** - grid zoom at six levels
- LED ring light with power pack, dimmable
- LED bottom light with power pack
- includes 0.5x accessory lens
- base plate with five prepunched holes
- two zoom ranges - twelve zoom levels
- USB 2.0 camera 1600 x 1200 pixels
- calibration disk 0.1 graduation and test report
- **KITEC ECO** measurement software

alternatively with the extended version of **KITEC PRO** measurement software

- **Order no. KITO 20 - PRO**