
KITO 40



The **KITO 40** model is a ready-to-use configuration with a separate height-adjustable positioning table. The adjustment range is 80 x 60 mm. Fine adjustment for height is made via the cross table unit. For easy, quick positioning of small parts the **KITO 40** is an ideal solution. As an option we offer a rotation table for the **KITO 40** which can simply be placed into the cross table opening. The glass insert plate of the cross table is then used for the rotation table. We would however like to point out that for very fine positioning jobs in the 0.01 mm range it makes more sense to use a **KITO 20** model with an appropriate precision cross table (page 14: EK-100 and EK-150 models). Weight: 13 kg, dimensions: 400 x 250 x 550 – 670 mm.

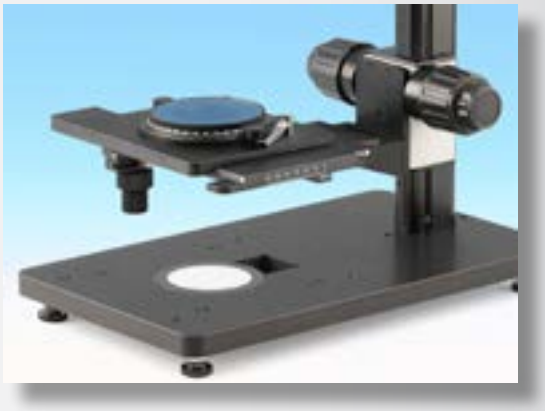

Scope of delivery and price for the **KITO 40** below:

KITOZOOM video microscope series
- **Order no. KITO 40 - ECO**
- **KITOZOOM** - grid zoom at six levels
- LED ring light with power pack, dimmable
- LED bottom light with power pack
- includes 0.5x accessory lens
- base plate with 80 x 60 mm cross table,
- two zoom ranges - twelve zoom levels
- USB 2.0 camera 1600 x 1200 pixels
- calibration disk 0.1 graduation and test report
- **KITEC ECO** measurement software

alternatively with the extended version of **KITEC PRO** measurement software

- **Order no. KITO 40 - PRO**

- **Order no. ROT-40 (rotation table for KITO 40)**